


SLIJEPA ZAKOVICE U BOJI

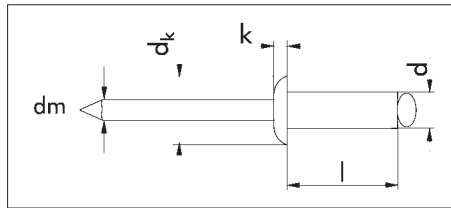

Plosnata okrugla glava

Čahura: plavo pasivirani
pocinčani čelik (A2K)

Trn: plavo pasivirani pocinčani
čelik (A2K)

d x l mm	Ø rupe mm	Područje ste- zanja mm	d _k mm	RAL	Otpornost na smični lom N	Otpornost na vlačni lom N	br. art.	JP/ kom.
3,2 x 6,0	3,3	0,5 - 2,5	6,5	8019	1400	1700	935 3268019	500
3,2 x 6,0	3,3	0,5 - 2,5	6,5	7016	1400	1700	935 3267016	500
3,2 x 6,0	3,3	0,5 - 2,5	6,5	9002	1400	1700	935 3269002	500
3,2 x 6,0	3,3	0,5 - 2,5	6,5	3009	1400	1700	935 3263009	500
3,2 x 6,0	3,3	0,5 - 2,5	6,5	9006	1400	1700	935 3269006	500
3,2 x 9,0	3,3	3,0 - 5,0	6,5	8019	1600	2000	935 3298019	500
3,2 x 9,0	3,3	3,0 - 5,0	6,5	7016	1600	2000	935 3297016	500
3,2 x 9,0	3,3	3,0 - 5,0	6,5	9002	1600	2000	935 3299002	500
3,2 x 9,0	3,3	3,0 - 5,0	6,5	3009	1600	2000	935 3293009	500
3,2 x 9,0	3,3	3,0 - 5,0	6,5	9006	1600	2000	935 3299006	500
4,0 x 10,0	4,1	4,5 - 6,5	8,0	8019	2000	2400	935 4108019	500
4,0 x 10,0	4,1	4,5 - 6,5	8,0	7016	2000	2400	935 4107016	500
4,0 x 10,0	4,1	4,5 - 6,5	8,0	9002	2000	2400	935 4109002	500
4,0 x 10,0	4,1	4,5 - 6,5	8,0	3009	2000	2400	935 4103009	500
4,0 x 10,0	4,1	4,5 - 6,5	8,0	9006	2000	2400	935 4109006	250

